


Universal-connector with lever

Fast, flexible & reliable

Our new terminal connectors are universally applicable for fine-wire, single-wire and multi-wire copper conductors with a diameter of 0.2 to 4.0 mm².


The transparent design and the practical test slot allow the correct position of the conductor to be checked.

Type	Article description	VPE (Pcs.)	Shipping carton (Boxes)	Article number
EM113 2	Universal-connector 2-poles	100	16	900410
EM113 3	Universal-connector 3-poles	50	20	900411
EM113 5	Universal-connector 5-poles	25	20	900412

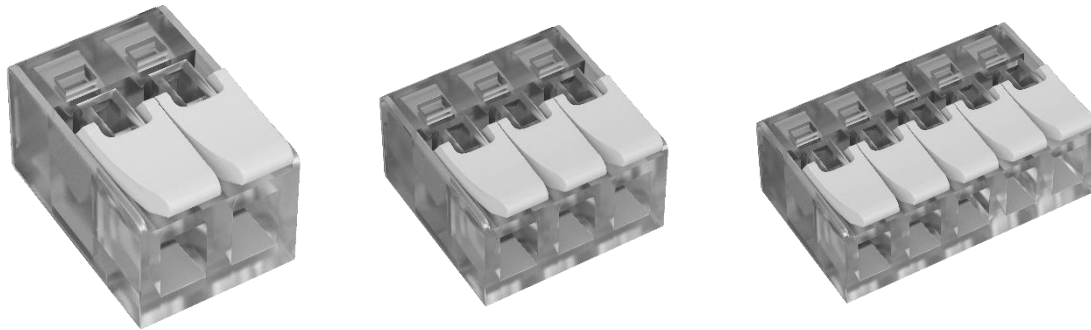

Specifications

Housing	Polycarbonate(94-V2)
Rated insulation voltage	450V
Rated current	32A
Ambient temperature	Max. 85 °C
Tests	CE, VDE, ENEC10
Color of the lever	White
Color of the housing	Transparent
Flame retardant according to UL94V-2	
Different diameters per connector	
Test slot on the back	

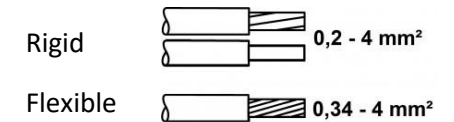

Questions or information:

sales@don-quichotte.nl

+31 492 74 50 00