


C profile rail, slot width 11 mm, with perforation, strip galvanised (MZ046)

For use as a support for cable or pipe routing.

Suitable for use with the Snap-on pipe clip OPDZ.

The rail has a predetermined breaking point every 10 cm. This means that the rail can be made the exact length required without any tool.

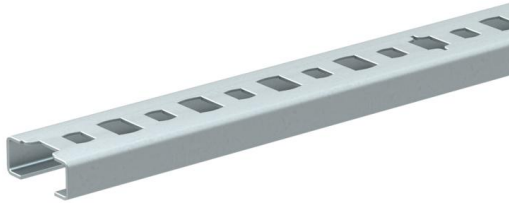

Master data

Item number	981650
Type	MZ046G 8x20x0,75
Description 1	Profile rail
Brand	DQ
Dimension	20x8x2000
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
PU1	2
Unit of quantity	Piece
Weight	21.1 kg
Weight unit	kg/100 pc.

Dimensions

Length	2,000 mm
Length	2 m
Width	20 mm
Height	8 mm

C profile rail, slot width 11 mm, with perforation, strip galvanised (MZ046)

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Maintain electrical functions	no
Hole shape (ETIM)	Long slot
Hole size	4,5x6 & 6x8 mm
Material thickness	0.75 mm
With tothing	no
Profile shape	C profile
Slot width	11 mm
Slot width	11 mm
Static value Iy	0.02 cm
Static value Iz	0.17 cm
Static value Wy	0.02 cm ²
Static value Wz	0.17 cm ²
Support load	0.13 kN