


Safe, easy and quick

The new Don Quichotte® - cable glands make it possible to install your cables very easy and safe to a junction box or divider cabinet ensured of a high IP-protection.

The cable glands are wide applicable in all known areas in the familiar metrical sizes.

All products are CE, VDE & UL certified, which is marked on the product.

Every cable gland will be supplied including screwed-on lock nut.

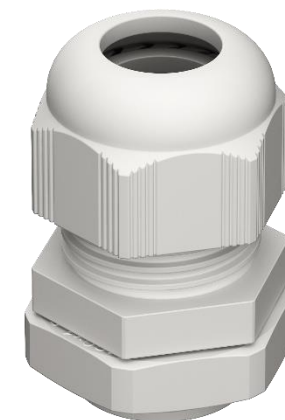

| Type | Article description | Clamping range Ø mm | VPE (Pcs.) | Shipping carton (Boxes) | Art. Nr. |
|-------|------------------------------|---------------------|------------|-------------------------|----------|
| EM125 | Cable gland M12x1,5 100st DQ | 3,0 – 6,5 | 100 | 12 | 902170 |
| EM125 | Cable gland M16x1,5 50st DQ | 5,0 – 10,0 | 50 | 30 | 902171 |
| EM125 | Cable gland M20x1,5 50st DQ | 6,0 – 12,0 | 50 | 20 | 902172 |
| EM125 | Cable gland M25x1,5 25st DQ | 9,0 – 16,0 | 25 | 24 | 902173 |
| EM125 | Cable gland M32x1,5 20st DQ | 15,0 – 21,0 | 20 | 25 | 902174 |
| EM125 | Cable gland M40x1,5 15st DQ | 19,0 – 28,0 | 15 | 22 | 902175 |
| EM125 | Cable gland M50x1,5 10st DQ | 25,0 – 31,0 | 10 | 16 | 902176 |
| EM125 | Cable gland M63x1,5 10st DQ | 34,0 – 44,0 | 10 | - | 902177 |

| Product attributes | |
|--------------------------------------|--------------------------|
| Protection | IP68 – 5 Bar, 30 minutes |
| Thread type | Metric EN 60423 |
| Thread rise | 1,5 |
| Environment temperature | -20 until +100 °C |
| Material body | PA 6 |
| Material seal | CR |
| Color | Light grey RAL 7035 |
| Certificates | CE, VDE, UL |
| Including lock nut | |
| With strain relief | |
| Flame retardant according to UL94V-2 | |

Requests or information:

sales@don-quichotte.nl

+31 492 74 50 00

Don Quichotte B.V.
Gerstdijk 17
5704 RG Helmond
The Netherlands

www.don-quichotte.com